

Bonding of buried magnets into a rotor; light fixation so that production can continue quickly


The Revolution: Light-fixable 2C Adhesives

Short cycle times by curing within seconds

2C epoxy resins are suitable for structural bonding and protective potting. For many industrial applications, the time lapse before reaching initial strength was deemed a major disadvantage – until now:

The new light-fixable DELO-DUOPOX DB (DB = Dual Bonding) products are faster than any previous 2C epoxy resin. It secures the components against slipping in just a couple of seconds, so that processing of the entire assembly can go ahead immediately. Reliable final curing – even in shadowed areas – is the same as for regular 2C products at room temperature or speeded up by heat.

Initial strength in seconds due to light fixation

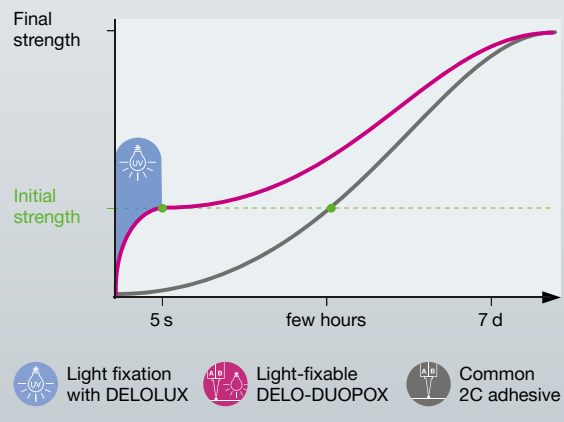

Your benefits



Fast light fixation within a few seconds
Production can continue quickly, short cycle times, increased throughput



Reliable final curing at room temperature
Investment and energy costs for heat curing are eliminated, less space required in production



Storage/transport at room temperature
Simple, cost-efficient logistics



High strength
Reliable protection of components, improved functionality



Excellent temperature resistance
Consistent adhesive properties over the entire lifetime of the components



Excellent media resistance
Reliable function over the entire lifetime of the components




Low outgassing, low shrinkage
Use in optoelectronic applications, such as cameras, possible



Low halogen content
Suitable for consumer electronics products

Areas of use




Sensor potting




Bonding of structural connecting elements (ONSERT®)

Sealing of plugs and switches

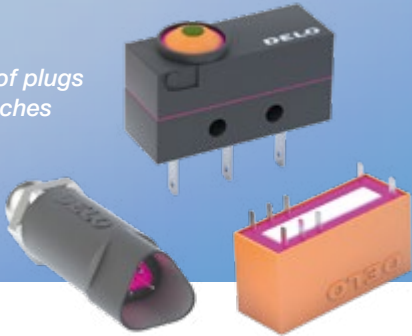

Bonding of compact camera modules



Magnet bonding for e-motors



VIDEO ON APPLICATIONS & FUNCTIONAL PRINCIPLE:

www.youtube.com/watch?v=RgY96MC5_KQ

Technical features

	DELO-DUOPOX DB8989	DELO-DUOPOX DB VE 26307
Application	bonding	potting, sealing
Color	whitish opaque	yellowish translucent
Viscosity [mPas]	170,000 comp. A 160,000 comp. B	50,000 comp. A 7,000 comp. B
Light fixation time until initial strength [s] LED 400 nm, intensity 1,000 mW/cm ² DELOLUXcontrol	1 – 20*	1 – 20*
Curing time until final strength [d] at room temperature (approx. +23 °C), not irradiated	7	7
Tensile shear strength AI/AI [MPa]	28	11
Storage life at room temperature (approx. +23 °C)	3 months	3 months

* depending on component geometry and adhesive volume

DB = Dual Bonding

CONTACT

DELO Industrial Adhesives
Headquarters

► Germany · Windach/Munich ...

..... www.DELO-adhesives.com

07/19

ADHESIVES

DISPENSING

CURING

CONSULTING

DELO

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e. g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose. Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent. All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

© DELO – This brochure including any and all parts is protected by copyright. Any use not expressly permitted by the Urheberrechtsgesetz (German Copyright Act) shall require DELO's written consent. This shall apply without limitation to reproductions, duplications, disseminations, adaptations, translations and microfilms as well as to the recording, processing, duplication and/or dissemination by electronic means.